

Features & Benefits

- Three models
- Approved for installation in humid areas
- Can be placed both on wall and in ceiling

Fans for wall- or ceiling mounting in areas which are in need of exhaust air. For example, bathrooms, shower- and laundryrooms.



Models

Model Fresh S100 / S125 / S150

Basic model without regulation.

Dimension Ø100 mm.

Modell Fresh S100 T / S125 T / S150 T

Fan with dimension Ø100 mm. The fan includes timer, adjustable between 3-35 min. Adjustments are made with a potentiometer beneath the front-cover.

Model Fresh S100 HT / S125 HT / S150 HT

Similar to S100 but with both timer and humidity control. The timer function is either 0 or 15 min-utes, this is adjusted by a removable pot on the circuit board. The humidity control is adjustable between 50-90% RH, adjustments are made with a potentiometer beneath the frontcover. The fan starts when the humidity exceeds set value and remains when the level has decreased below this value.

Specification

| Model | Description | Art. no. |
|--------|--|----------|
| S100 | Bathroomfan without regulation, Ø100mm | 197104 |
| S100T | Bathroomfan with built-in timerfunction, Ø100mm | 197105 |
| S100HT | Bathroomfan with built-in humidity and timerfunction, Ø100mm | 197106 |
| S125 | Bathroomfan without regulation, Ø125mm | 197114 |
| S125T | Bathroomfan with built-in timerfunction, Ø125mm | 197115 |
| S125HT | Bathroomfan with built-in humidity and timerfunction, Ø125mm | 197116 |
| S150 | Bathroomfan without regulation, Ø150mm | 197124 |
| S150T | Bathroomfan with built-in timerfunction, Ø150mm | 197125 |
| S150HT | Bathroomfan with built-in humidity and timerfunction, Ø150mm | 197126 |

S100/125/150


Exhaust fans

Dimensions (mm)

| S100 | |
|------|-----|
| A mm | 160 |
| B mm | 100 |
| C mm | 80 |
| D mm | 97 |

| S125 | |
|------|-----|
| A mm | 187 |
| B mm | 125 |
| C mm | 131 |
| D mm | 149 |

| S150 | |
|------|-----|
| A mm | 223 |
| B mm | 147 |
| C mm | 111 |
| D mm | 130 |

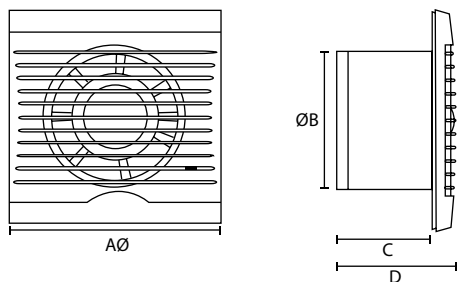

Technical data

| Model | S100 | S125 | S150 |
|-----------------|-----------------------|------------------------|------------------------|
| Diameter | Ø 100 | Ø 125 | Ø 150 |
| Voltage | 220-240/ 50 V/ Hz | | |
| Capacity | 99 m ³ / h | 185 m ³ / h | 241 m ³ / h |
| Power | 14 W | 16 W | 20 W |
| Pressure | 35 Pa | 55 Pa | |
| Soundlevel | 33 dB(A) 3m | 34 dB(A) 3m | 43 dB(A) 3m |
| Protectionclass | IPX4, CE-marked | | |

Mounting

The fan can be mounted horizontally or vertically in a channel (either on wall or in ceiling).

Min dimension Ø100/125/150 mm.

Maintenance

The fan should be cleaned once a year for optimal function. Before cleaning the fan the electric voltage must be disconnected.

Guarantee

The fan has a three year guarantee for defects of fabrication.

Recycling

The product is marked with WEEE symbol, which indicates that it must not be disposed together with household waste, but must be recycled at a suitable recycling location in the local municipality.

Fresh AB is a member of Sweden's national recycling system, in accordance with the European WEEE directive.

For more information, see www.fresh.eu